

zagavolter

Extendible Telescopic 380' Haymaker



ZK380 HD



- Tedding spreading 3 metres width
- Tedding swath spreading 3 metres
- Turning/Windrowing 3.0 to 3.8 metres.

This latest telescopic model in the Volter Range from Zaga has all the excellent features of model ZK-3000, the universal 3 metre Haymaker. However due to its variable width the 380 has the added advantage of being able to operate with wider mowers. The 380 can carry out every conditioning operation required on grass for both Hay and Silage. The variable width allows more grass to be mowed for baling or foraging.



3 Metre




3.8 Metre

The telescopic transmission allows a varied width on the machine. The operator can easily change the width by using a folding handle. This will operate a lever arm which pivots on the transmission (see above photo). Two large thumb screws lock the sliding box section chassis in the required position. The Telescopic Haymaker is simple and more economical than its competitors who use more expensive methods.

PLUS Points of the Volter Extendible Telescopic 380

- A) Strong box steel sliding chassis
- B) Unique folding handle for width adjustment
- C) Adjustable rear gates for setting swath width
- D) Crop divider wheel for balancing swath
- E) Large forged thumb screws for locking
- F) Staybar- with large coil spring for floating of machine in work
- G) Precise height of wheels
- H) 10 overlapping tines on each rotor
- J) Large hinged headstock to fit the bigger tractors
- K) Wide tyres (see below)

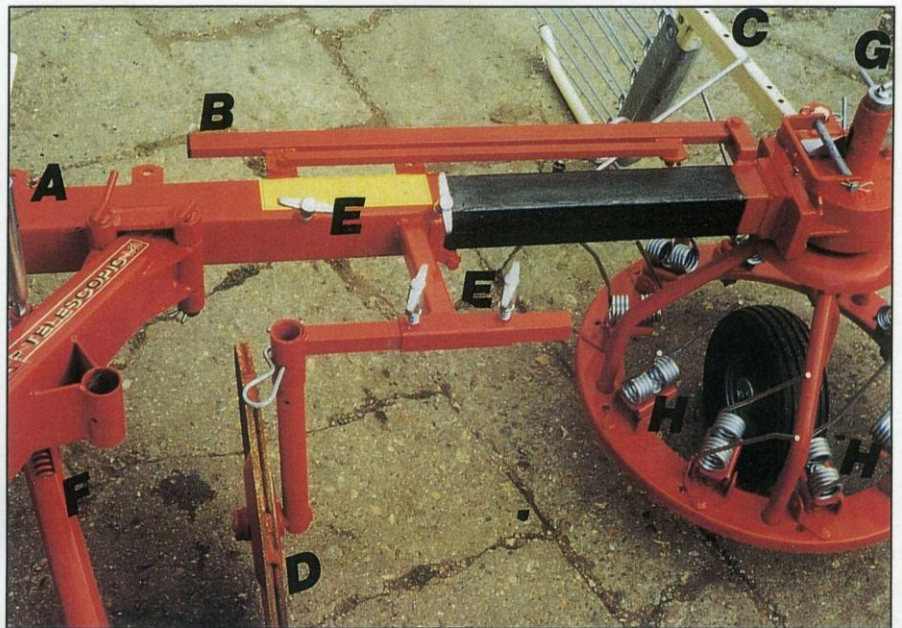

Technical Specification

- Weight** - 300Kg
- Linkage** - CAT I & II
- Transmission** - 2 Bevel Gear Boxes
- Maintenance** - 7 Grease Nipples
- PTO Speed** - 450 - 540 rpm
- Rotor Speed** - 170 - 180 rpm
- Number of tines** - 10 per rotor
- Working width (Tedding)** - approx. 2.90 metre
- Working width (Rowing)**-adjustable between 2.95 to 3.8 metres
- Transport width (Not folded)** - 2.5 metres
- Transport width (Folded)** - 1.3 metres
- Tyres (pneumatic)** - 2 of 15 x 6.00 - 6 ply
- PTO Safety Clutch** - prevents overload.

OPTIONAL EXTRAS

- Puncture proof tyres using special sealant
- Narrow wheels
- Overrun clutch on PTO

Due to constant development the specification may alter without notice

Manufactured in the EEC

Please contact your local your nearest Zaga Dealer or:

ZAGA U.K.
SOUTHERN AREA
OXFORD

Tel: 01844 281421
Fax: 01844 260367
CE1999

ZAGA U.K.
NORTHERN AREA
GOOLE
NORTH YORKSHIRE

Tel: 01977 661928

Dealer's stamp

